

/ SHREDDING

# Komptech Terminator

SINGLE-SHAFT, HIGH-TORQUE  
INDUSTRIAL WASTE SHREDDER



MASTER DISTRIBUTOR OF KOMPTECH

Seriously, the name is an understatement.





**The heavy-duty CAT® engine, high-torque drive, and robust spiral teeth cut, tear, and evenly shred tough waste into variable output sizes.**

## / QUICK STATS

- Handle heavy C&D, tires, mattresses, and MSW with confidence
- Reduce fuel, labor and maintenance with load-dependent processing
- Easily adjust shredding output from 6-inch to 3-foot minus for optimized downstream sorting



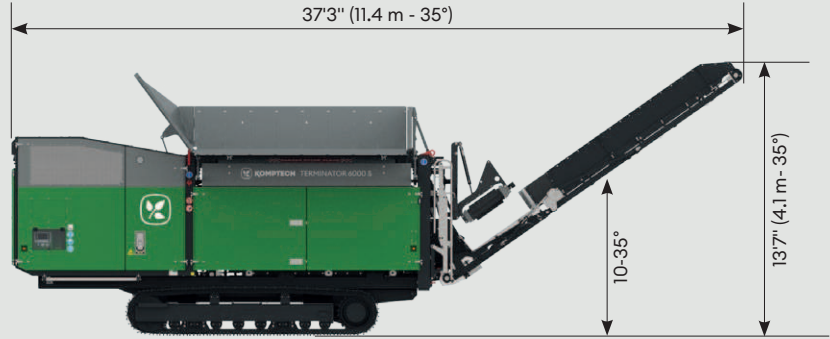

## KOMPTECH TERMINATOR / Technical Specifications

Machine Model	TERMINATOR 6000 S	TERMINATOR 3400 S
<b>Power</b>		
Diesel Engine / Horsepower:	CAT® C18 Tier 4 Final / 600 HP	CAT® C9 Tier 4 Final / 330 HP
Drive:	Hydraulic Drum Drive - Both Sides	Hydraulic Drum Drive - Both Sides
<b>Proportion</b>		
Transport Dimensions (LxWxH):	22'9" x 9'4" x 10'9" (6.9 x 2.9 x 3.3 m)	22'9" x 9'4" x 10'9" (6.9 x 2.9 x 3.3 m)
Working Dimensions (LxWxH):	37'3" x 10'10" x 13'7" (11.4 x 3.3 x 4.1 m)	37'3" x 10'10" x 13'7" (11.4 x 3.3 x 4.1 m)
Drum Diameter / Drum Length:	3'5" (1.5 m) / 9'10" (2.9 m)	3'5" (1.5 m) / 9'10" (2.9 m)
Loading Height:	9'6" (2.9 m)	9'6" (2.9 m)
Discharge Height:	6'-13'7" (1.8-4.2 m)	6'-13'7" (1.8-4.2 m)
Weight:	~53,000 lbs	~51,600 lbs
<b>Performance (dependent on material)</b>		
Maximum Drum Speed:	38 rpm	29 rpm
Maximum Throughput:	~100 tons/hr	~50 tons/hr

Think Viably for industry expertise, world-class products, parts, service, and support.

Wherever you work.



CONSTRUCTION AND DEMOLITION (C&D)



MUNICIPAL SOLID WASTE (MSW)



ORGANICS WASTE



SINGLE-STREAM RECYCLING



Scan to see the Terminator in action >

